


► PRECISION BALANCE MODEL 5161-LED

The model 5161-LED precision balance contains the following features:

- 1 | High precision load cell.
- 2 | Resistant plastic housing.
- 3 | Big size stainless steel pan.
- 4 | High contrast easy to read LED display.
- 5 | Built-in rechargeable battery.
- 6 | Height adjustable feet.
- 7 | Full capacity taring.
- 8 | Fast response.
- 9 | Overload protection.
- 10 | Selectable measure units: kg, lb, g.
- 11 | Piece counting function.
- 12 | RS232 interface.

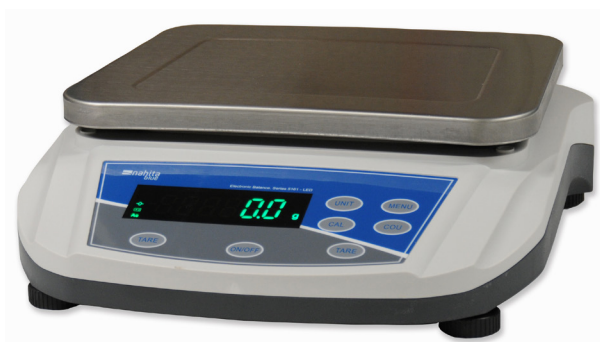

Program adjustment CAL.



Stripes of measurement of widening.



Units of weighing.



Adapter of current.



Piece counting.



Feeding by accumulation.



Interface of data RS-232.

Reference	KBB012	KBB013
Maximum capacity	10 kg	20 kg
Tare range	10 kg	20 kg
Readability	0.1 g	0.1 g
Repeatability	± 0.1 g	± 0.1 g
Non-linearity	± 0.2 g	± 0.2 g
Corner error	± 0.2 g	± 0.2 g
Pan size	337 x 237 mm	
Dimensions (LxWxH)	370 x 370 x 125 mm	
Power supply	AC 110V – 220V	
Rechargeable battery	4V/4AH	
Operating temperature	5 - 35 °C	
Relative humidity	50 – 85%	