



Electronic temperature controller "Electemp-B"

ADJUSTABLE TEMPERATURE FROM 0 °C TO 310 °C.

NEW DESIGN

FEATURES

Regulates the power to the heating element by pulsing electronic circuit, free of noise and interferences

APPLICATIONS

Regulates the power of temperature in ovens baths, radiators, hotplates, etc.

CONTROL PANEL

Temperature display indicator.
Set temperature display indicator.
Set value increase/decrease button.

BACK OF CONTROLLER

Output of power (Schuko plug system).
Protection fuse.
Connection for a PT100 probe (included)



"Electemp-B" application to a hotplate, showing the unit connected with an electronic contact thermometer.

MODEL

Part No.	Height / Width / Depth cm (exterior)	Max. power W (at 230 Vav)	Max. power W (at 110 Vav)	Weight Kg
3000896	15 15.5 19	2500	1700	1.2

COMECTA Digital thermometer "TC-9226-A"

FEATURES

Main body made of PVC with anti-slide for better stability.
Temperature range from -200 °C to 1370 °C (-328 to 2498 °F).
Reads °C or °F, reading within 1 second.
Memorizes the last 10 temperature readings. Displays the reading for 3 seconds. It is possible to hold the reading on the screen.
Switches off automatically after 1 hour (if it is in a continuous mode).
LCD with back light illumination.
Low battery power indicator.
Powered by 3 x 1.5V "AAA" batteries".
Compatible with most Type K sensors.
Operating conditions: from -10 to 50 °C.
Dimensions: (height x width x depth): 17 x 7 x 3 cm. Weight 150g.

MODEL	Part No.	Temp. range °C	Resolution °C	Precision °C
CT-9226-A	5903030	-200 to 1370	0.1	from -200 to -50: ±2 from -50 to 740: ±1 from 740 to 1370: ±2

The precision figures supplied are based on a measurement range from 18 to 28 °C (does not include the sensor error).



Supplied complete with a Type K sensor and cable of 1.40 mm Ø x 100 cm long.

ACCESSORY

Sensor type K of 8 mm Ø x 30 cm length. Part No. 5903025

COMECTA Digital Humidity meter with Thermometer "HT-305E"

FEATURES

Temperature range from 0 °C to 60 °C.
Humidity range from 10% to 95% RH.
Digital Display °C or in °F Fast response: 0.4".
Power: battery 9 V.
Dimensions: (height x width x depth): 3.2 x 6 x 13.25 cm.
Weight: 264 g.

Part No. 5903023
Supplied complete with humidity / temperature sensor, protective cover and carry case.

MODEL	Part No.	Temp. range °C	Resolution °C	Precision °C	Humidity range %	Humidity resolution %	Humidity precision %
HT-305E	5903023	from 0 to 50	0.1	±0.8	from 10 to 95	0.1	> 70%: ±3% +1% < 70%: ±3%





Ink Printer "Microprinter"

APPLICATIONS

Small ribbon printer (not thermal) with paper roll 2 1/4" (56 mm) wide.
Interface connection: RS232.
Applications: Measuring equipment, pH meters, conductivity meters, spectrophotometers, etc.
Includes interface cable and power transformer 5V - 3A and cable.

MODEL

Part No.	Height / Width / Depth cm	Power supply	Weight Kg
4120113	4 16 10	DC 5V 3A	1




Automatic programmer "Promat" 24 H

Connects and disconnects electrical power by a pre-programmed timer switch.
Adjustable timer: Cycles up to 24 hours, with controllable connection disconnection up to every 15 minutes.
Manual interrupt setting to disconnect the program, luminous indicator shows when power is being applied.
Maximum current: 16 Amp.
Part No. 1000500



COMECTA Timer alarm "Relavis"

Audible sound when the program time has lapsed.
Time setting from 0 to 60 minutes in 1 minute intervals.
Part No. 5900499

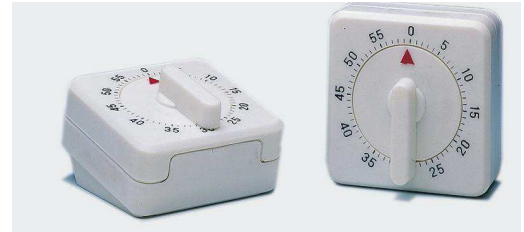


COMECTA Digital alarm timer "Count Down-Up"

Maximum count time 99 min. 59 sec. Timer: count-down and count-up.
Portable: table top with magnetic holder or clip if used on a pocket or overall.
Audible alarm fitted.
Part No. 5900500



COMECTA Digital Chronometer "Diamond"

Maximum timer: 23 hr 59 min 59 sec. Division 1/100 seconds. Control: LAP/SPLIT (timer: split time and accumulative time).
Date incorporated.
Audible Alarm (duration 60 seconds).
Audible Alarm "snooze" function (once pressed the stop alarm goes off every 5 minutes until it is completely shut off).
Part No. 5900501



COMECTA Thermometer reader "Micro-Temp"

SUITABLE FOR MEASURING TEMPERATURE FROM -50 °C TO +300 °C OR FROM -58 °F TO +527 °F.

Applications: process control, laboratories, pharmacies, food processes and agriculture in general.
Digital screen readout in °C or °F.
Stainless steel penetration probe of 3.5 mm Ø x 120 mm long.
Retention memory of minimum and maximum data readout.
Disconnects automatically after 1 hour.
Powered by a 5V - 3A battery.

MODEL

Part No.	Precision	Resolution
5903029	±1 °C / 1 °F	0.1 °C / 0.1 °F

Comes complete with protective cover and support clip.

