



JIZERSKÁ PORCELÁNKA, s.r.o.

Producer of laboratory and technical porcelainsince1947




PRODUCT SPECIFICATIONS SHEET

Casserole with lid and removable wood handle

Jizerská porcelánka s.r.o. certifies, that the specified products meet all specifications and quality criteria for release. The products comply in every respect with the relevant particular specifications, drawings, relevant standards and regulations in force.

Sign	JIPO Code	V (ml)	H (mm)	D (mm)
210/1	641 322 210 101	125	40	75
210/1 V (cover)	641 322 210 111		30	87
210/2	641 322 210 201	200	45	85
210/2 V (cover)	641 322 210 211		34	100

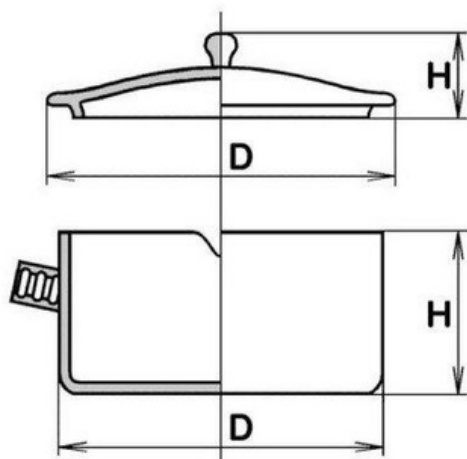

Intended uses: Laboratory applications.
Can be used in microwave, dishwasher, direct fire only with ceramic wire gauze. Do not use for induction heating.

Material: Porcelain C110

Shape: Flat bottom, with spout and wood removable handle, without graduation. Cover.



JIZERSKÁ PORCELÁNKA, s.r.o.

Producer of laboratory and technical porcelainsince1947



PRODUCT SPECIFICATIONS SHEET

Casserole with lid and removable wood handle

Compliant to: ISO material for the manufacture lies within the group C110 according to ČSN EN 60672 –3
Product dimension tolerances are controlled by DIN 40680
Acid resistance acc. to ISO 1775

Properties: Unglazed products can be used at temperatures up to 1350°C / 2462°F and glazed ones at temperatures of up to 1000°C / 1,832°F (Δt 230°C)
Products have high resistance to acids and bases
Density 2.4 g/cm³
Bending strength of unglazed products (70MPa)
Thermal conductivity (W.m-1.K-1) = 1.3

The compliance of demands is proved by regular tests and followed noticed tests from an independent laboratory:

Test according ČSN EN 60672-2
Determination of thermal shock resistance Δt 230°C
Test in liquid nitrogen
Test resistance to acids and bases

Disclaimer: *Jizerská porcelánka s.r.o. wants to state that these specifications can only be regarded as general information and will not discharge the user from his obligation to ensure the product is suitable for the intended use. If there's any doubt ask us.*