



Griffin beakers, PMP, raised red scale

Highly transparent. According to ISO 7056.

With easily readable molded, embossed red graduations.

Cat. No. 60695, 60795: Red printed graduations, not molded.

To preserve markings, do not clean at temperatures exceeding 60 °C. Conditionally autoclavable at 121 °C (2 bar) according to DIN EN 285. For autoclaving we recommend the design with molded graduations (Cat. No. 60895 – 61795).

| Volume ml | Divisions ml | Height mm | Ø mm | PU | Cat. No. |
|-----------|--------------|-----------|------|----|----------|
| 25 | 5 | 50 | 38 | 12 | 60695 |
| 50 | 10 | 60 | 47 | 12 | 60795 |
| 100 | 10 | 70 | 55 | 12 | 60896 |
| 150* | 20 | 80 | 66 | 12 | 60996 |
| 250 | 25 | 95 | 77 | 6 | 61096 |
| 400* | 50 | 112 | 87 | 6 | 61196 |
| 500 | 50 | 118 | 94 | 6 | 61296 |
| 600* | 50 | 127 | 100 | 6 | 61396 |
| 1000 | 100 | 147 | 120 | 6 | 61496 |
| 2000 | 200 | 187 | 149 | 6 | 61596 |
| 3000 | 250 | 212 | 170 | 4 | 61696 |
| 5000 | 500 | 247 | 203 | 4 | 61796 |

* Variant in addition to ISO 7056



Watch glasses, PTFE

121°C


White. Without base.

High thermal stability and chemical resistance.

Autoclavable at 121 °C (2 bar) according to DIN EN 285.

Ideal for use to cover beakers.

| Ø mm | PU | Cat. No. |
|------|----|----------|
| 50 | 1 | 113197 |
| 75 | 1 | 113297 |
| 100 | 1 | 113397 |
| 125 | 1 | 113497 |

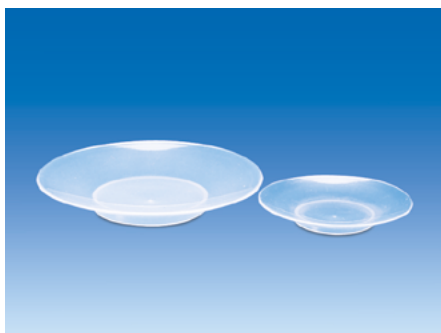

Watch glasses, PP

121°C

Transparent. With base.

Autoclavable at 121 °C (2 bar) according to DIN EN 285.

Ideal for use to cover beakers.

| Ø mm | PU | Cat. No. |
|-------|----|----------|
| 60 | 10 | 80452 |
| 80 | 10 | 80454 |
| 100 | 10 | 80455 |
| 118.5 | 10 | 80456 |