

MX-S+


Digital Vortex Mixer

Features

- LCD screen displays real-time speed and time for easy adjustment and monitoring.
- Adjustable speed ranges from gentle to vigorous mixing to suit various needs.
- Stable with pressure-mounted accessories to prevent slippage and splashing.
- Brushless DC motor for high stability and maintenance-free operation.
- Sturdy base ensures stability during operation for safety.
- Includes various accessories for different sizes and types of tubes and plates.
- Low noise for a quiet working environment.



Specifications	MX-S+
Speed	100-3000 rpm
Display	LCD
Amplitude	4 mm
Operating Modes	Touch, Continuous
Time Range	1 s - 99 min 59 s
Motor Type	Brushless DC Motor
Dimensions (L×W×H)	160x146x115mm
Weight	3.4kg
Power Supply	100-240 V, 50/60 Hz
Input Voltage	24 V
Power Consumption	25 W
Ambient Temperature & Humidity	5-40°C, 80% RH
Enclosure Protection	IP21

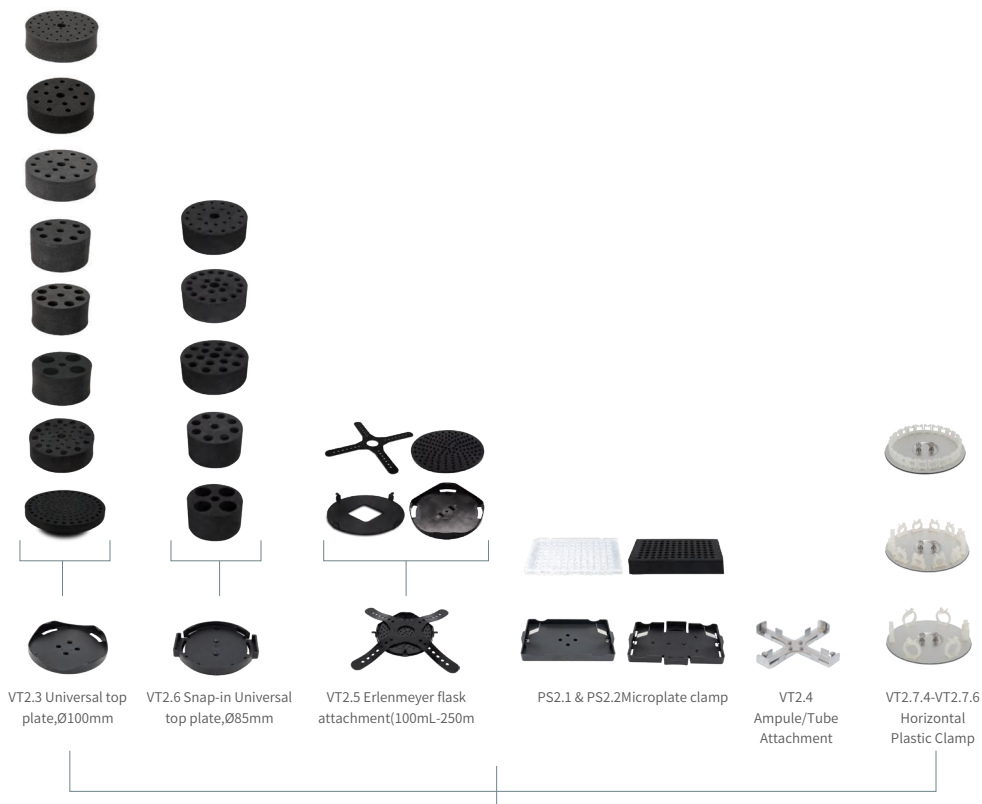

Accessories of Vortex Mixer MX-S+ & MX-Pro

Accessories of MX-S+&MX-Pro

VT2.3	Cat. No.18901365	
Universal top plate, compatible with VT1.3.1-VT1.3.12 Tube Adapter		
VT2.4	Cat. No.18901366	
Ampule/Tube Attachment, 4pc ampule/tube (0.2mL-15mL)		
VT2.5	Cat. No.18901367	
Erlenmeyer flask attachment (100mL-250mL), Operating speed: 0-1500rpm		
PS2.1	Cat. No.18901360	
Microplate clamp, Suitable for workboards (full skirt PCR plates, cell culture plates, enzyme-linked immunosorbent assay plates, deep well plates, etc. Half skirt/no skirt PCR plates need to be used with rectangular foam, which is already included)		

Accessories of MX-S+&MX-Pro (New)

VT2.1	Cat. No.18901379	
Top cup, Suitable for MX-Pro		
VT2.1	Cat. No.18901380	
Top cup, Suitable for MX-S+		
VT2.2	Cat. No.18901373	
Flat Rubber Sleeve (Standard)		
VT2.6	Cat. No.18901368	
Snap-in Universal top plate, compatible with VT2.6.1-VT2.6.5 Tube Adapter		
VT2.6.1	Cat. No.18901378	
Tube Adapter, 25 holes, Ø4.5mm(0.1-0.5mL), Applicable to RUN mode		
VT2.6.2	Cat. No.18901377	
Tube Adapter, 21 holes, Ø8mm(1.5-2mL), Applicable to RUN mode		
VT2.6.3	Cat. No.18901376	
Tube Adapter, 16 holes, Ø10mm(2-5mL, Not compatible with 5 mL conical tubes. Compatible with standard 5 mL centrifuge tubes.), Applicable to RUN mode		
VT2.6.4	Cat. No.18901375	
Tube Adapter, 8 holes, Ø14mm (10-15mL, supports 5 mL conical tubes; incompatible with standard 5 mL centrifuge tubes.), Applicable to RUN mode		
VT2.6.5	Cat. No.18901374	
Tube Adapter, 4 holes, Ø25.5mm(50mL), Applicable to RUN mode		
VT 2.7.4	Cat. No.18901870	
Horizontal Plastic Clamp, 24 holes×1.5mL Test Tube (Circular plate)		
VT 2.7.5	Cat. No.18901871	
Horizontal Plastic Clamp, 12 holes×15mL Test Tube (Circular plate)		
VT 2.7.6	Cat. No.18901872	
Horizontal Plastic Clamp, 6 holes×50mL Test Tube (Circular plate)		
PS2.2	Cat. No.18901361	
Snap-in Microplate clamp, Suitable for workboards (full skirt PCR plates, cell culture plates, enzyme-linked immunosorbent assay plates, deep well plates, etc. Half skirt/no skirt PCR plates need to be used with rectangular foam, which is already included)		

*Material color may vary slightly during the initial launch phase. Please refer to the actual product.